



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

11046 U.S. PTO  
10/074135  
02/12/02

#5

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01111722.3

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

01/06/01

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 01111722.3  
Demande n°:

Anmeldetag:  
Date of filing: 15/05/01  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Agilent Technologies, Inc.  
Palo Alto, CA 94306  
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Linear cavity tunable laser

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/UK  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

Our Ref.: 20010575

EPO - Munich  
60

15. Mai 2001

## LINEAR CAVITY TUNABLE LASER

### BACKGROUND OF THE INVENTION

The present invention relates to wavelength tunable laser sources.

Wavelength tunable laser sources are becoming increasingly important in industry.

- 5 A typical design for such tunable laser sources with external cavity is disclosed e.g. in EP-A-921614.

### SUMMARY OF THE INVENTION

- 10 It is an object of the present invention to provide an improved wavelength tunable laser source preferably fostering miniaturization. The object is solved by the independent claims. Preferred embodiments are shown by the dependent claims.

- According to the present invention, a laser source is provided having a spatially linear cavity structure, so that all essential components within the lasing cavity can be arranged in a linear manner (i.e. substantially in a line without requiring angular designs). The laser source comprises a laser medium (e.g. a laser chip) having a  
15 back facet and a front surface, whereby the laser medium emits a beam through the front surface into an external cavity defined in length by a cavity end mirror. The laser medium preferably is a semiconductor laser medium. The cavity end mirror reflects the light signal back towards the laser medium, resulting in a resonance behavior in the cavity between the cavity end mirror and the back facet  
20 of the laser medium.

- A wavelength tunable filter is arranged between the laser medium and the cavity end mirror. The presence of the wavelength tunable filter will allow resonance in the cavity only to such wavelengths or wavelength ranges as defined by its wavelength characteristic. Tuning the wavelength of the wavelength tunable filter  
25 thus allows controlling the wavelength(s) of the resonant beam(s) within the cavity.

In a first embodiment of the present invention, the cavity end mirror is provided to

Our Ref.: 20010575

be partly transparent, preferably semi-transparent, so that a portion of the beam within the cavity will be coupled out, thus providing a first output of the linear laser cavity. The first output is characterized by high-wavelength purity and low source spontaneous emission (SSE) due to coupling out close to the transmission through the wavelength tunable filter and before being amplified again by the laser medium.

In another preferred embodiment the linear cavity laser further provides a second output derived from providing the back facet of the laser medium to be partly transparent. The second output is characterized by having higher optical power but also higher SSE and lower wavelength purity than the first output. However, by carefully designing the characteristic of the partly transparent cavity end mirror and/or the transparency characteristics of the back facet of the laser medium allows to provide two controlled outputs: one with lower power but higher wavelength purity, and the other with higher power but lower wavelength purity. The characteristics of both the cavity end mirror and the back facet should be carefully adjusted in order to yield in the desired laser characteristics.

In another embodiment of the present invention, a mode hop free lasing can be provided by synchronizing the wavelength selection provided by the wavelength tunable filter with the (effective) optical length of the cavity. The length of the cavity can be modified e.g. in that either one of the cavity end mirror or the laser medium (including the back facet), or both, is linearly moved in the (linear) direction of the laser beam within the cavity. A synchronizing unit preferably controls the wavelength setting of the wavelength tunable filter and the optical path length of the cavity. In case of a laser with continuous wavelength tuning capability, the synchronizing unit preferably controls the mode number to be kept constant over the tuning.

In one embodiment the output of the laser is monitored and applied to the synchronizing unit for synchronizing wavelengths and optical path lengths. In another embodiment, a predefined optical path length will be associated with each

Our Ref.: 20010575

wavelength value selectable for the wavelength tunable filter. Carefully adjusting the optical path length to the selected wavelength allows to achieve substantially mode hop free laser output when sweeping through a range of wavelength values.

- In a further embodiment, the cavity end mirror is provided with (substantially) 5 hundred percent reflectivity towards the cavity. Instead of coupling out the low SSE first output beam from the cavity end mirror, a beam splitter is provided between the cavity end mirror and the tunable filter for coupling out the first output beam. Alternatively, a beam splitter can be provided between the tunable filter and the laser medium, so that light returning from the tunable filter towards the laser medium will 10 be coupled out (as the first output beam). Although such designs 'depart' from the linear arrangement of components, it is to be understood that the linear arrangement is not a 'must' for all components but that this linear architecture allows the arrangement of the essential components laser medium, wavelength tunable filter, and cavity end mirror in a space reduced linear manner.
- 15 The cavity end mirror can be provided as planar mirror having at least two angular degrees of freedom for adjustment of the mirror. Adjustment can be provided either manually or by means of adequate actuators. The cavity end mirror can also be provided as curved mirror, preferably together with a focussing optics, which is less sensitive to angular misalignment and easy to align with good cavity stability.
- 20 In one embodiment, the cavity end mirror is provided as a three-dimensional retro reflector, preferably as an open corner cube or a solid glass corner cube. In case that the front surface of the cavity end mirror is provided to be fully reflective, all surfaces of the three-dimensional retro reflector or solid glass corner cube are provided with 100% reflectivity. In case that the front surface of the cavity end 25 mirror is provided to be partially reflective, at least one surface of the three-dimensional retro reflector has to be semitransparent.

The invention can be partly embodied or supported by one or more suitable software programs, which can be stored on or otherwise provided by any kind of

Our Ref.: 20010575

data carrier, and which might be executed in or by any suitable data processing unit. In particular, control algorithms might be provided by hardware and/or software tools.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- 5 Other objects and many of the attendant advantages of the present invention will be readily appreciated and become better understood by reference to the following detailed description when considering in connection with the accompanied drawings. Features that are substantially or functionally equal or similar will be referred to with the same reference sign(s).
- 10 Figs. 1-3 show preferred embodiments according to the present invention.
- Fig. 4 shows a preferred embodiment for the cavity end mirror 30.

#### DETAILED DESCRIPTION OF THE INVENTION

In Figure 1, a semiconductor chip 10 is provided as active laser gain medium, having a front surface 10A and a back facet 10 B. While the front surface 10A is preferably anti-reflection coated, the back facet is preferably provided with a high reflectivity (HR) coating. A laser beam leaving the semiconductor chip 10 through the front surface 10A is passed through a lens 20 and a wavelength tunable filter 30 to a cavity end mirror 40 having a semitransparent front surface 40A. A portion of the laser beam is reflected by the front surface 40A back towards the wavelength tunable filter 30, while another portion is coupled out by the cavity end mirror 40 as a first output beam 50.

The optical path between the front surface 40A and the back facet 10B provides the cavity of the laser, whereby the optical path between the front surface 40A of the cavity end mirror 40 and the front surface 10A of the semiconductor chip 10 represents an external cavity.

Another portion of the laser beam within the cavity can be coupled out at the back



Our Ref.: 20010575

facet 10B as a second output 60. The second output signal 60 is preferably launched through a lens 70, an isolator 80, and a beam splitter 90 and might be coupled by a lens 100 into a fiber 110. A portion of the second output beam 60 can be coupled out by the beam splitter 90 and directed to a detector 120 for monitoring the second output.

In accordance with the above described coupling out of the second output beam 60, the first output signal 50 is also preferably launched through an isolator 130, a beam splitter 140, and a lens 150 to a fiber 160. The beam coupled out from the beam splitter 140 can be directed to a detector 170 for monitoring the first output beam 50.

The wavelength tunable filter 30 in the cavity provides a wavelength filtering to the laser beam within the cavity, so that only such laser modes can build up that are not filtered out by the wavelength tunable filter 30. Controlling the wavelength (range) of the tunable filter 30 thus allows selecting the desired wavelength or wavelength range for the outputs 50 and 60.

The wavelength tunable filter 30 preferably is a tunable Fabry Perot filter or an acousto-optic tunable filter.

It is to be understood that the essential laser setup of the embodiment of Figure 1 only comprises the laser medium 10 having a partially transparent back facet 10B, the wavelength tunable filter 30, and the cavity end mirror 40 having a partially transparent front surface 40A. All further components are optional dependent on the specific application and requirements. In particular, the isolators 130 and 80 are provided to decouple the cavity from external light signals, in particular light signals reflected from the beams 50 and 60, so that the cavity will not be disturbed from external. This, however, is not essential for the present invention and can be omitted or solved otherwise. The lenses 150 and 100 are provided to couple the output beams 50 and 60 in the respective fibers 160 and 110, however, other coupling methods and light paths (than the fibers 160 and

Our Ref.: 20010575

110) can be provided accordingly. The beam splitters 140 and 90 together with the monitors 170 and 120 are optionally provided to monitor the respective output beams 50 and 60. The lens 20 is preferably provided to generate a collimated beam to achieve high resonator finesse (good quality) at the cavity side, while the  
5 lens 70 is preferably provided to generate a collimated beam to launch the optical power through further components such as isolator and/or beam splitter at the output side.

From Figure 1 it becomes apparent that all essential cavity components can be arranged in a spatially linear manor, or, in other words, in a line of components  
10 without requiring to direct or redirect the light beam in angles (others than 180°) as required for example when employing a Littman or Littrow architecture. This allows to significantly reducing the cavity in size rendering it subject to further miniaturization.

The first output signal 50 provides a high-purity signal with respect to wavelength  
15 purity and signal-to-noise ratio, since it is coupled out directly behind the wavelength tunable filter 30 and before returning into the semiconductor chip 10 and being amplified again. The second output signal 60, in contrast thereto, provides a high power output at a significantly higher potential output power than the first output signal 50 but also with higher source spontaneous emission (SSE).

20 Instead of coupling out both, the first and the second output 50 and 60, the back facet 10B can be provided to be fully reflective so that no light is coupled out to the second output 60. In that case the first output signal 50 represents the only output of the linear cavity laser setup.

On the right hand side in Fig. 1, typical spectral shapes are shown for the first and  
25 the second output 50 and 60 and of the tunable filter 30. However, the intensity scale for both outputs is different, with the intensity of the first output being significantly smaller than the intensity of the second output 60.

Figure 2 shows another preferred embodiment. Instead of coupling out the first

Our Ref.: 20010575

output beam 50 by means of the front surface 40A of the cavity end mirror 40, the front surface 40A in the embodiment of Figure 2 is provided to be fully reflective, and a beam splitter 200 is arranged between the cavity end mirror 40 and the wavelength tunable filter 30. The first output beam 50A is derived from the beam  
5 splitter 200 and coupled out in accordance with the embodiment of Figure 1. In this embodiment, the essential cavity features are still arranged in a linear manner, and only the output beam 50A is redirected from that linear arrangement. The embodiment of Fig. 1 is mechanically easier in case that the cavity end mirror 40 is provided to be movable (as will be explained below).

- 10 In accordance with the above described, the first output signal 50A can also be launched through an isolator 210, a beam splitter 220, and a lens 230 to a fiber 240. The beam coupled out from the beam splitter 220 can be directed to a detector 250 for monitoring the first output beam 50A.

- 15 Alternatively but not shown in Fig. 2, the beam splitter can also be provided between the tunable filter 30 and the laser medium 10 (but before the lens 20), so that light returning from the tunable filter 30 towards the laser medium 10 will be coupled out (as the first output beam 50A).

- Figure 3 shows a combined approach from the embodiments of Figures 1 and 2. The front surface 40A of the cavity end mirror 40 is provided to be partially  
20 transparent emitting the first output beam 50 as in Figure 1. The beam splitter 200 couples out a portion of the cavity laser signal as the output beam 50A as in Figure 2. Thus, a third output can be provided, e.g. for monitoring purposes.

- In a preferred embodiment, as indicated in all embodiments of Figures 1 – 3, the cavity end mirror 40 is provided to be adjustable in the direction of the cavity length  
25 (as indicated by the arrow underneath the cavity end mirror 40). This allows to adjust the optical path length of the laser cavity (between the back facet 10B and the front surface 40A) in order to provide mode hop free laser tuning when modifying the wavelength of the wavelength tunable filter 30.

Our Ref.: 20010575

In a preferred embodiment (not shown in Figures), the cavity end mirror 40 is adjustable in the direction of the cavity length by means of a translation stage. This can be accomplished e.g. by Piezo stack or a spindle driven slider with a guiding mechanism.

- 5 In another preferred embodiment, the adjustment of the cavity length by moving the cavity end mirror 40 as well as the wavelength tuning of the wavelength tunable filter 30 are controlled and synchronized by a controller (not shown in the Figures).

- 10 Instead of or in combination to moving the cavity end mirror 40, also the back facet 10B of the laser medium 10 can be moved, e.g. by moving the laser medium 10.

Figure 4 shows a preferred embodiment of the cavity end mirror 30. Instead of providing the cavity end mirror 30 as planar mirror, it can also be provided as curved mirror, preferably together with a focussing optics 400. The focal length of the focussing optics 400, e.g. a lens, should be matched to the mirror curve radius.

- 15 In a further embodiment, the cavity end mirror 30 is provided as a three-dimensional retro reflector (trihedral prism), preferably as an open corner cube or a solid glass corner cube e.g. a corner cube prism U43 as provided by Edmund Industrie Optic GmbH. In case of the embodiment of Figure 2, wherein the front surface 40A is provided to be fully reflective, all surfaces of the three-dimensional  
20 retro reflector or solid glass corner cube are provided with 100% reflectivity. In case of the embodiments of Figure 1 or 3, at least one surface of the three-dimensional retro reflector has to be semitransparent.

- 25 In case that the cavity end mirror 40 is provided by a plane mirror, there are at least two angular degrees of freedom for adjustment of the mirror. Adjustment can be provided either manually or by means of adequate actuators. Adjusting collimating lenses in x or y direction could also be applied instead of the two angular degrees of freedom. The collimated beam should preferably hit the end mirror perpendicular.

Our Ref.: 20010575

EPO - Munich  
60

15. Mai 2001

## CLAIMS:

1. A laser source (10, 30, 40) comprising:

a laser medium (10) having a back facet (10B) and a front surface (10A),  
whereby the laser medium (10) is adapted to emit a laser beam through the  
front surface into an external cavity defined in length by a cavity end mirror  
(40) reflecting the laser beam back towards the laser medium (10), and

a wavelength tunable filter (30) arranged between the laser medium (10) and  
the cavity end mirror (40) adapted for tuning the wavelength of the laser  
beam,

wherein the laser medium (10), the wavelength tunable filter (30), and the  
cavity end mirror (40) are arranged in a spatially linear cavity structure  
substantially in a line without angular redirection of the laser beam in the  
cavity between the laser medium (10) and the cavity end mirror (40).

2. The laser source (10, 30, 40) of claim 1, wherein at least one portion of the  
laser beam within the cavity after passing the wavelength tunable filter (30)  
and before again passing the laser medium (10) is coupled out as an output  
beam (50) of the laser source (10, 30, 40).

3. The laser source (10, 30, 40 – Figs. 1 and 3) of claim 1 or 2, wherein the  
cavity end mirror (40) is provided to be partly transparent for coupling out a  
first output beam (50).

4. The laser source (10, 30, 40 – Figs. 2 and 3) of claim 1 or any one of the  
above claims, wherein a beam splitter is provided between the wavelength  
tunable filter (30) and the cavity end mirror (40) or between the wavelength  
tunable filter (30) and the laser medium (10) for coupling out a third output  
beam (50A).

5. The laser source (10, 30, 40) according to claim 1 or any one of the above

claims, wherein the back facet (10B) of the laser medium (10) is provided to be partly transparent, so that a portion of the laser beam within the cavity is coupled out as a second output beam (60) of the laser source (10, 30, 40).

- 5 6. The laser source (10, 30, 40) according to claim 1 or any one of the above claims, wherein at least one of the laser medium (10) or the cavity end mirror (40) is movable in the linear direction of the spatially linear cavity structure in order to adjust the optical path length of the cavity to the wavelength tuning provided by the wavelength tunable filter (30).
- 10 7. The laser source (10, 30, 40) of claim 6, further comprising a synchronizing unit adapted synchronizing the optical path length of the cavity with the wavelength tuning provided by the wavelength tunable filter (30) in order to provide the laser beam to be substantially mode hop free when tuning the wavelength.
- 15 8. The laser source (10, 30, 40) of claim 6 or 7, wherein at least one portion of the laser beam within the cavity after passing the wavelength tunable filter (30) and before again passing the wavelength tunable filter (30) is coupled out as an output beam (50) of the laser source (10, 30, 40).
- 20 9. The laser source (10, 30, 40 – Figs. 1 and 3) of claim 8, wherein the cavity end mirror (40) is provided to be partly transparent for coupling out a first output beam (50).
10. The laser source (10, 30, 40 – Figs. 2 and 3) of claim 8 or 9, wherein a beam splitter is provided between the wavelength tunable filter (30) and the cavity end mirror (40) for coupling out a third output beam (50A).
- 25 11. The laser source (10, 30, 40) according to claim 6 or any one of the above claims 7-10, wherein the back facet (10B) of the laser medium (10) is provided to be partly transparent, so that a portion of the laser beam within the cavity is coupled out as a second output beam (60) of the laser source

15-05-2001

Agilent Technologies

EP01111722.3

May 11, 2001

CLMS

Our Ref.: 20010575

(10, 30, 40).

**THIS PAGE BLANK (USPTO)**



Agilent Technologies

May 11, 2001

Our Ref.: 20010575

EPO-Munich  
60

15. Mai 2001

## ABSTRACT

A laser source (10, 30, 40) comprising a laser medium (10) having a back facet (10B) and a front surface (10A), whereby the laser medium (10) is adapted to emit a laser beam through the front surface into an external cavity defined in length by

5 a cavity end mirror (40) reflecting the laser beam back towards the laser medium (10). A wavelength tunable filter (30) is arranged between the laser medium (10) and the cavity end mirror (40) adapted for tuning the wavelength of the laser beam. The laser medium (10), the wavelength tunable filter (30), and the cavity end mirror (40) are arranged in a spatially linear cavity structure substantially in a

10 line without angular redirection of the laser beam in the cavity between the laser medium (10) and the cavity end mirror (40).

[Fig. 1 for publication]

**THIS PAGE BLANK (USPTO)**

EPO-Munich  
60

15. Mai 2001

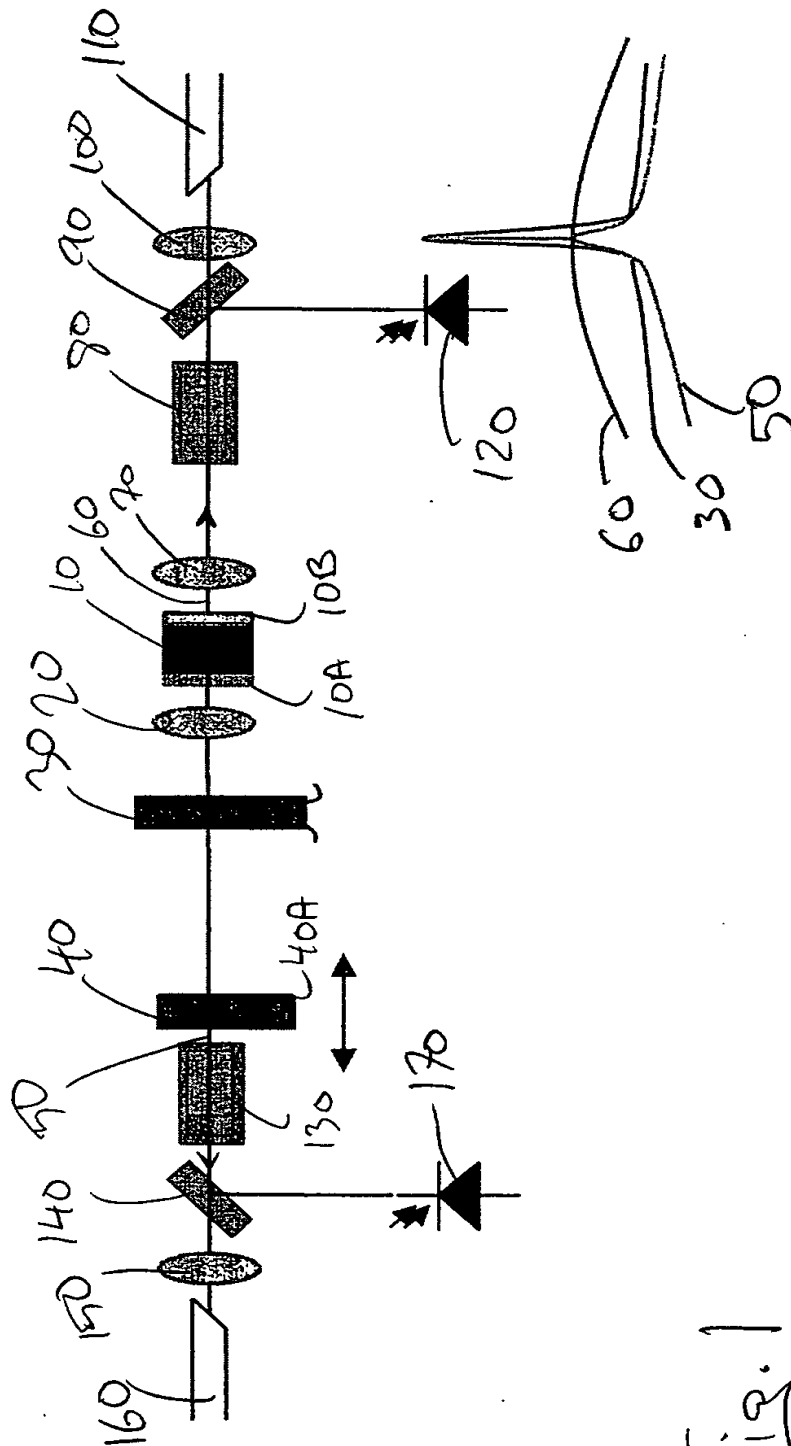


Fig. 1

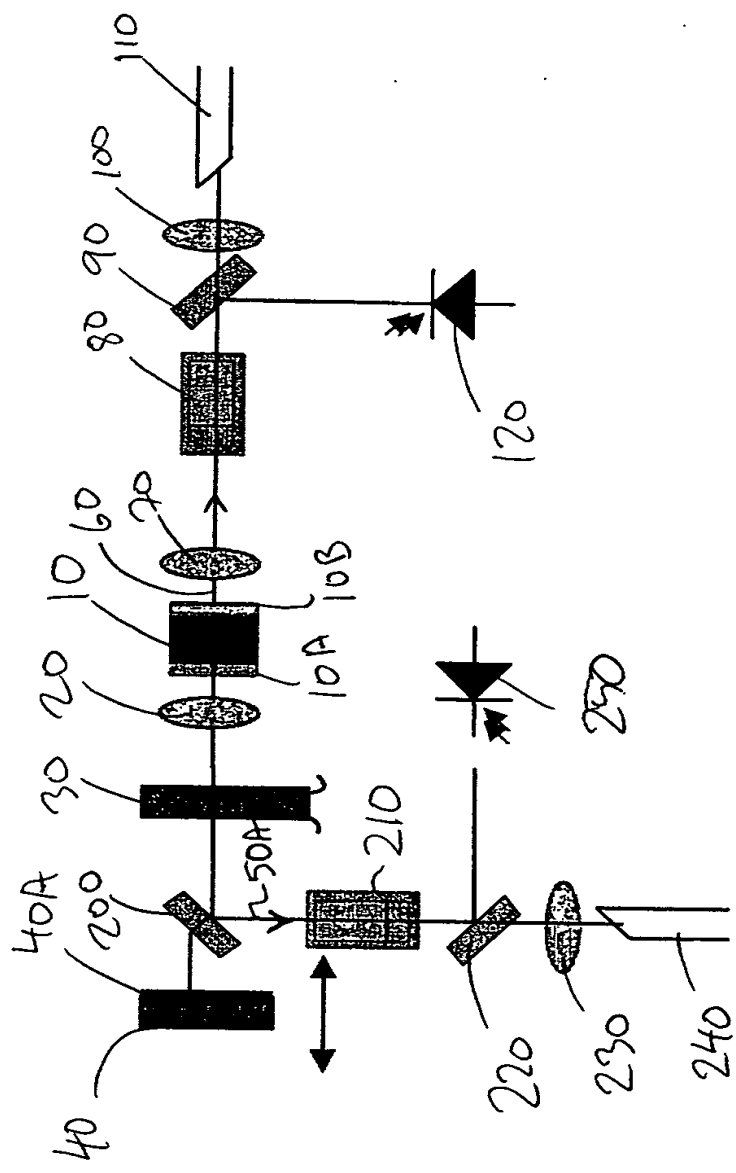


Fig. 2



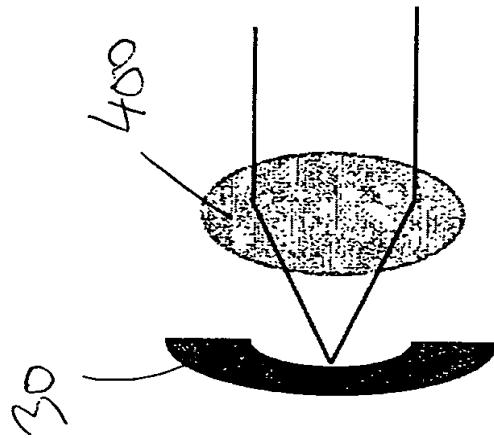


Fig. 4